



## S300 Series Dust Monitors - with a difference!

### Principle of Operation

Sintral dust monitors are based on a unique Inductive Electrification technology. The measurement is based on particles interacting with an isolated probe mounted into the duct or stack. When moving particles pass nearby or hit the probe a signal is induced. This signal is then processed through a series of Sintral's advanced algorithms to filter out the noise and provide the most accurate dust measurement output.

### Sintral

Ruosilantie 15,  
FI-00390 Helsinki, FINLAND  
Tel. +358 9 561 7360  
e-mail: [info@sintralproducts.com](mailto:info@sintralproducts.com)  
[www.sintralproducts.com](http://www.sintralproducts.com)

[www.sintralproducts.com](http://www.sintralproducts.com)



## Manage your dust removal process

### Official Emissions Measuring – QAL1

- Automatic range setup
- No manual adjustment required
- Automatic drift compensation
- No optical windows to be cleaned
- No alignment required
- Vibration has no effect on the reading

#### Features

	S301	S303	S304	S305
2 Independent alarm relays (user selectable alarm limits, NO or NC)	•	•	•	•
4-20 mA signal output		•	•	•
Remote setup & configuration		•	•	•
Self zero check				•
Span check				•
Filter bag leak detection. ON-OFF systems. Pneumatic transport	•	•	•	•
Trend monitoring. Filter performance		•	•	•
Filter performance. Particulate emissions		•	•	•
Stack monitoring. Can be calibrated to mg/m <sup>3</sup>			•	•
Serial communication			•	•
ATEX approved model	x	x	x	x
Remote models	x	x	x	x

• Standard    x Optional

#### S301

Equipped with two independent alarm relays which can be used for early warning and failure, or connected to alarm-devices, S301 is used to detect filter deterioration and blockage or breakage. The alarms can be used for process control (as an ON-OFF system) in flow – no flow situations in bulk solids handling and pneumatic transport applications. Very fast response time, a typical characteristic of these monitors, enables early detection and prevention of expensive product loss to the environment.

#### S303

With a 4-20 mA analog signal output used for trend monitoring, S303 is installed downstream from a filter,

cyclone, dryer or similar devices to monitor filter performance as well as particulate emissions. It has two alarm relays that will engage when particulate levels in the gas stream exceed a preset level. It can also be used for process control in certain applications. S301 and S303 are designed for use in any process fitted with bag, ceramic, cartridge filters or cyclones where indicative (qualitative) monitoring is required.

#### S304

Combining the S303's features with the added feature of allowing calibration to give readings in mg/m<sup>3</sup> format, it can give plant operators the ability to see absolute value measurements of dust concentrations. Installed in emissions stacks or in common ducts of a



Dustlog screen

stack, the S304 can give a continuous dust concentration in the process enabling constant monitoring of the dust levels.

#### S305

Equipped with a Self Zero and Self Span check, the S305 meets all QAL1 requirements for official emissions regulations, as proven by its TÜV certification. Used for emissions monitoring in official stack measurements for reporting to authorities as well as providing a mg/m<sup>3</sup> reading to plant operators. Gives plants a continuous measurement of particulate emissions to ensure it remains within its imposed regulatory limits.

#### ATEX Models

- Certified for ATEX Zone 20, 21 or 22
- Approved to Category II 1/2 for Gas and Dust
- IP65 Enclosure, Custom Designed
- Certification Type:  
II 1/2 GD EEx ia IIC, T6, IP65, 85°C
- Utilising SINTROL's Advanced Inductive Electrification Technology

The ATEX directive covers health and safety of workers potentially at risk from exposure to explosive environments. This directive classifies areas into Zone 0, 1, 2 for gas and 20, 21 or 22 for dust and guides plant operators to install the appropriate ATEX certified systems. Products are required to be categorised by the level of protection that they offer against the risk of them becoming a potential source of ignition in an explosive atmosphere. The equipment conformity categories are 1, 2 & 3.



Datalogging chart

#### Split Architecture (Remote) Models

S300 Series includes the following remote models: S311, S313, S314 and S315. The remote models are used when the sensor has to be installed with the control unit up to 200 meters away. In these models, the sensor is connected to an enclosure housing the preamplifier (PA) and the amplified signal is transmitted with a 4-wire shielded cable using one of the recommended cables.

#### Dustlog 8


The new Dustlog 8 is a revolutionary data logging system and reporting tool that gives the user greater access to the monitor than ever before. A wide range of reports can be generated to see historical trends in the measurement with the ability to generate monthly, daily or hourly averages charted on nice graphs. Additionally, the easy user interface gives the plant the full control of the device's parameters so they can be read, sent or configured directly from the control room. After installation of the monitor, almost all access to the monitor can be done remotely using the Dustlog 8.

#### Industrial Applications

- Cement
- Chemical processing
- Metallurgical
- Foundries
- Pharmaceutical
- Fertilizers
- Wood processing
- Food
- Tobacco
- Animal feed processing
- Power plants
- Waste incinerators
- Pulp and paper



Remote display  
D400 – Remote digital display supplied with S300 Series Monitors (optional)

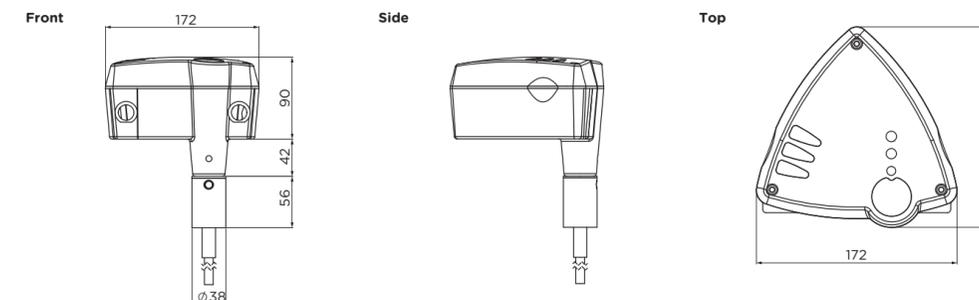

#### Technical Specifications

Measurement Objects	Solid particles in a gas flow
Particle Size	0.3 µm or larger
Measurement Range	From 0.1 mg/m <sup>3</sup>
Measurement Principle	Inductive Electrification
Protection Category	IP65
Probe Length (total/measuring)	500 mm / 440 mm, 750 mm / 690 mm (optional), 1000 mm / 940 mm (optional), > 1000 mm on request
Power Supply	115 VAC, 230 VAC or 24 VDC
Power Consumption	DC model Max 3 W, AC model Max 8 W
Wiring Connections – Power Supply	DIN PG11 cable gland
Wiring Connections – Output Signals	DIN PG11 cable gland
Process Connection	socket (38 mm OD), quick clamp (optional), flange (optional)
Output Signals (dependant on models)	- Isolated 4-20 mA - Two SPDT relays: 5 A, 24 V AC / DC - Serial communication, (RS-485)
Communication Type	Modbus RTU
Range Set Up	- Normal measuring range: automatic, based on average measured dust flow during setup procedure - Extended measuring range: User selectable (not available in S305)
Relay Alarm Settings	- Automatic, set at factory: Based on average measured dust flow - User selectable ranges
Offset trim	Automatic drift compensation
Damping Time	10 to 300 s
<b>Process Conditions</b>	
Temperature	Max 300 °C, Max 700 °C (optional)
Pressure	Max 300 kPa, Max 600 kPa (optional)
Gas Velocity	Min 4 m/s
Humidity	Max 95 % RH (non-condensing)
<b>Ambient Conditions</b>	
Temperature	-20 to +45 °C and 60°C for 24 VDC
Humidity	Max 95 % RH (non-condensing)
Vibration	Max 5 m/s <sup>2</sup>
<b>Materials and Weight</b>	
Probe (wetted part)	Stainless steel (AISI 316L)
Probe Coating (wetted part)	PTFE Teflon (optional)
Process Connection (wetted part)	Stainless steel (AISI 316L)
Probe Insulation (wetted part)	PEEK
Probe Sealing (wetted part)	FPM Viton
Enclosure	Aluminum alloy
Weight	2.3 kg